

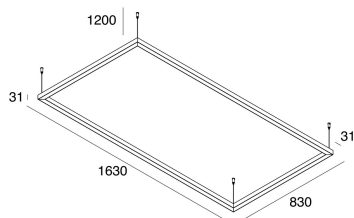


# P-30 READY

103343.02

**novalux**  
ITALIAN LIGHTING DESIGN SINCE 1948



## Features

Use: Indoor  
Type of installation: SUSPENDED  
Emission: DIRECT  
Optics: OPAL  
Colour: BLACK  
Dimming: ON/OFF  
Emergency: NO  
L: 1630mm  
A: 830mm  
H: 31mm  
Made in: ITALY  
Warranty: 5 years  
Weight: 8kg

## Tech data

Luminaire input power: 56W  
Luminaire luminous flux: 4728lm  
IP: 40  
Insulation class: I  
No. of driver per product: 2  
Supply voltage: 220-240V 50/60Hz  
SELV: Si

## Source

Light source: LED  
Source power: 48W  
Source luminous flux: 8904lm  
Colour temperature: 3000K  
CRI: >90  
Colour tolerance: 3 Step MacAdam  
LED lifespan: 50000h L90 B10

## Compliance

CEI EN 60598-1:2021 + A11:2023, CEI EN 60598-2-1:2022

## Standards

Photobiological risk: RISK GROUP 0 Certified fixture in EXEMPT GROUP, in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.  
CAM edilizia: The product complies with the requirements for public buildings, ministerial decree of 23rd June 2022 n.256.

[P-30 READY: View more product info](#)




Novalux S.r.l. via Marzabotto, 2 40050 Funo di Argelato (BO) Italy  
Tel: +39 051 860558 · Fax +39 051 6647859 · Mail: [info@novalux.it](mailto:info@novalux.it) · VAT number 00536541204 · [novalux.com](http://novalux.com)  
Company subject to the management and coordination by SLV GmbH

This technical data sheet is owned by Novalux S.r.l., all rights reserved. Novalux S.r.l. reserves the right to make changes without prior notice.  
Last update: 6/8/2025, 12:53:50

# P-30 READY


103343.02

## MOUNTING ACCESSORIES




P-30: ROSONE QDR CARTON. L=1200 3P NERO

103319.02




P-30: ROSONE LATER. ALIM L=1200 3P BIA

103320.01




P-30: ROSONE DOPPIO CART . L=1200 3P NER

103367.02




P-30: ROSONE LATER. DOPPIO L=1200 3P NER

103368.02



P-30: ROSONE LATER. ALIM L=1200 3P NERO

103320.02



P-30: ROSONE QDR CARTON. L=1200 3P BIA

103319.01

