

P-30 PCB

105832.02



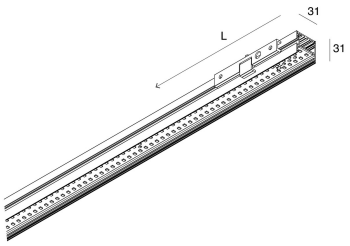

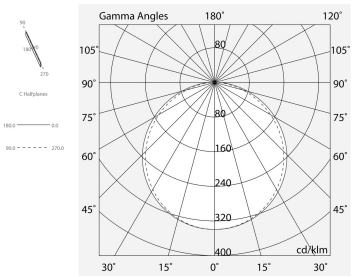

Features

Use: Indoor
Type of installation: WALL
Emission: DIRECT, INDIRECT
Optics: OPAL
Colour: BLACK
Dimming: NO
Emergency: NO
L: 800mm
A: 31mm
H: 31mm
Made in: ITALY
Warranty: 5 years
Weight: 0.8kg

Tech data

Luminaire input power: 11.1W
Luminaire luminouse flux: 834lm
IP: 40
Insulation class: I
No. of driver per product: 1
Supply voltage: 220-240V 50/60Hz
SELV: Sì

Source

Light source: LED
Source power: 8W
Source luminous flux: 1574lm
Colour temperature: 4000K
CRI: >90
Colour tolerance: 3 Step MacAdam
LED lifespan: 50000h L90 B10

Compliance

CEI EN 60598-1:2021 + A11:2023, CEI EN 60598-2-1:2022

Standards

Photobiological risk: RISK GROUP 0Certified fixture in EXEMPT GROUP, in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.
CAM edilizia: CAM edilizia - Conforme al Decreto Ministeriale 23 giugno 2022 n.256 e 24 novembre 2025 n.256.

P-30 PCB: View more product info

Novalux S.r.l. via Marzabotto, 2 40050 Funo di Argelato (BO) Italy
Tel: +39 051 860558 · Fax +39 051 6647859 · Mail: info@novalux.it · VAT number 00536541204 · novalux.com
Company subject to the management and coordination by SLV Gmbh

This technical data sheet is owned by Novalux S.r.l., all rights reserved. Novalux S.r.l. reserves the right to make changes without prior notice.
Last update: 9/6/2026, 16:27:11

P-30 PCB



105832.02

novalux
ITALIAN LIGHTING DESIGN SINCE 1948

SCREENS

	P-30: DIFF. OPALE L=6500	**103315.99**
	P-30: DIFF. OPALE PER L800	**103360.99**

COMPLETION ACCESSORIES

	P-30: ANGOLO L PLAFONE-SOSP-PARETE NERO	**103327.02**
	P-30: COVER ANGOLO L NERO	**103329.02**
	P-30: TESTATE PLAF/SOSP/PAR/SPOT NERO	**103361.02**
	P-30: SNODO 3P PER PCB/STRIP NERO	**105853.02**
	P-30: SNODO NO CAVI NERO	**105854.02**

This technical data sheet is owned by Novalux S.r.l., all rights reserved. Novalux S.r.l. reserves the right to make changes without prior notice.
Last update: 9/6/2026, 16:27:11