


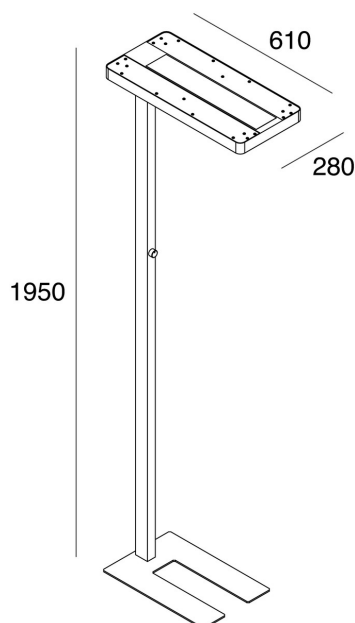

Features

Use: Indoor
Type of installation: FLOOR
Emission: DIRECT/INDIRECT
Optics: MICROPRISMATIZED
Colour: WHITE
Dimming: ROTARY DIMMER
Emergency: NO
L: 610mm
A: 280mm
H: 1950mm
Warranty: 5 years
Weight: 15kg

Tech data

Luminaire input power: 86W
Luminaire luminous flux: (3K) 5755lm / (4K) 6425
Direct luminous flux: (3K) 2433lm / (4K) 2716
Indirect luminous flux: (3K) 3322lm / (4K) 3708
IP: 40
Insulation class: I
No. of driver per product: 1
Supply voltage: 220-240V 50/60Hz
UGR: <19
SELV: No

Source

Light source: LED
Source power: 80W
Source luminous flux: (3K) 9055lm / (4K) 10106
Colour temperature: 3000K/4000K
CRI: >90
LED lifespan: 50000h L80 B10

Compliance

CEI EN 60598-1:2021 + A11:2023, CEI EN 60598-2-1:2022

Standards

Photobiological risk: RISK GROUP 0 Certified fixture in EXEMPT GROUP, in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.
CAM edilizia: The product complies with the requirements for public buildings, ministerial decree of 23rd June 2022 n.256.

[View more product info](#)