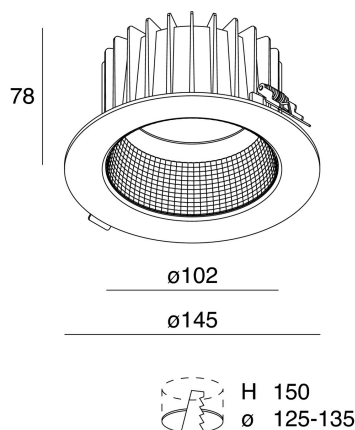


Features

Use: Indoor
 Type of installation: RECESSED INTO PLASTERBOARD
 Emission: DIRECT
 Optics: SPOT
 Beam: 36°
 Colour: SHINY CHROME
 Dimming: NO
 Emergency: WITH ACCESSORY
 H: 78mm
 ø: Ø145
 D: 125-135mm
 Warranty: 5 years
 Weight: 0.7kg

Tech data

Luminaire input power: 18.5W
 Luminaire luminous flux: 1636lm
 Luminous flux in emergency: 1h: 26% / 3h: 10%
 IP: 40
 Insulation class: II
 No. of driver per product: 1
 Supply voltage: 220-240V 50/60Hz
 UGR: <19
 SELV: Sì

Source

Light source: LED
 Source power: 16W
 Colour temperature: 4000K
 CRI: >90
 LED lifespan: 50000h L90 B10

Compliance



CEI EN 60598-1:2021 + A11:2023, CEI EN 60598-2-1:2022, CEI EN 60598-2-2:2012

Standards

Photobiological risk: RISK GROUP 1 Certified fixture in RISK GROUP 1 (Low Risk)-The fixture does not pose a hazard due to normal behavioral limitations on exposure - in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.

CAM edilizia: CAM edilizia - Conforme al Decreto Ministeriale 23 giugno 2022 n.256 e 24 novembre 2025 n.256.

EMERGENCY ACCESSORIES

	THE PANEL 2: EMER.INC.3H 10/54VDC	1020A5.99
	THE PANEL 2: EMER.INC.1H 10/54VDC	1020A4.99