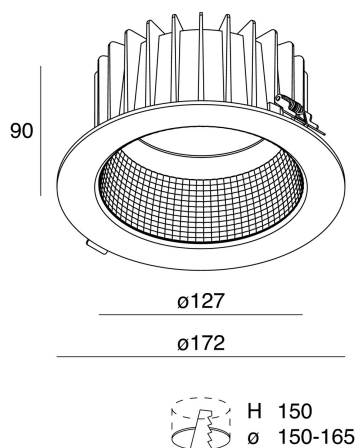


## Features

Use: Indoor  
Type of installation: RECESSED INTO PLASTERBOARD  
Emission: DIRECT  
Optics: SPOT  
Beam: 60°  
Colour: SHINY CHROME  
Dimming: PUSH, DALI  
Emergency: WITH ACCESSORY  
H: 90mm  
ø: 172mm  
Warranty: 5 years  
Weight: 1.1kg

## Tech data

Luminaire input power: 24W  
Luminaire luminous flux: 2179lm  
Luminous flux in emergency: 1h: 19% / 3h: 8  
IP: 40  
Insulation class: II  
No. of driver per product: 1  
Supply voltage: 220-240V 50/60Hz  
UGR: <19  
SELV: Si

## Source

Light source: LED  
Source power: 22W  
Colour temperature: 3000K  
CRI: >90  
LED lifespan: 50000h L80 B10

## Compliance

CEI EN 60598-1:2021 + A11:2023, CEI EN 60598-2-1:2022, CEI EN 60598-2-2:2012

## Standards

Photobiological risk: RISK GROUP 1 Certified fixture in RISK GROUP 1 (Low Risk)-The fixture does not pose a hazard due to normal behavioral limitations on exposure - in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.

CAM edilizia: The product complies with the requirements for public buildings, ministerial decree of 23rd June 2022 n.256.


## Average luminance

Average luminance limits for DSE workstation 65°(in accordance to EN 12464-1:2012).

[NIK: View more product info](#)

**EMERGENCY ACCESSORIES**


---



THE PANEL 2: EMER.INC.1H 10/54VDC

**1020A4.99**

---



THE PANEL 2: EMER.INC.3H 10/54VDC

**1020A5.99**