

BACKLIT




BACKLIT

I pannelli LED Backlit sono una soluzione alternativa alle loro controparti edgelit. I LED collocati sul retro del pannello emettono la luce direttamente verso il basso, consentendo una ridotta dispersione di luminosità. La tecnologia dei pannelli Backlit presentati da Novalux permette di mantenere un ridotto spessore del pannello e al contempo ottenere una perfetta uniformità sul diffusore, con basso coefficiente di abbagliamento. Ciò li rende adatti ad ambienti molto eterogenei, inclusi ambienti in cui è richiesto un valore UGR<19.


Backlit LED panels are an alternative solution to their edgelit counterparts. LEDs placed on the back of the panel emit light directly downward, allowing for reduced brightness dispersion. The technology of the Backlit panels presented by Novalux allows for maintaining a reduced panel thickness while achieving perfect uniformity on the diffuser, with a low glare coefficient. This makes them suitable for highly diverse environments, including those requiring a UGR<19 value.

NEW BACKLIT

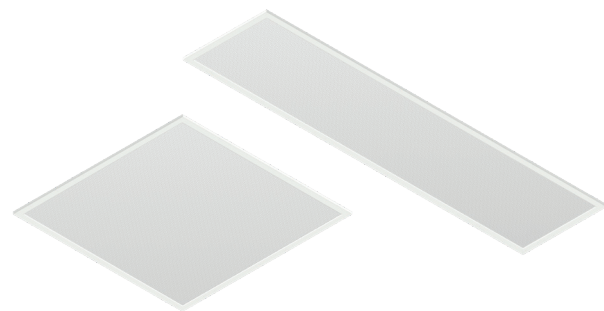

Pannello LED con cornice in lega di alluminio verniciata a polvere bianca, diffusore microprismatico in polistirene. UGR<19 4H-8H, S=0,25, per tutte le riflessioni. Installabile ad incasso su controsoffitto a pannelli con struttura a vista senza accessori e in battuta in cartongesso di spessore 10-12,5mm con kit molle. Alimentatore elettronico incluso.

LED panel with white powder-coated aluminum frame, microprismatic polystyrene diffuser. UGR<19 4H-8H, S=0.25, for all the reflections. Installable recessed into panel ceiling with visible structure without accessories and flush-mounted in gypsum board of thickness 10-12.5mm with spring kit. Electronic power supply included.




BACKLIT 600x600

		3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
32W	3807 lm	113601.01	3892 lm 113602.01

DALI-PUSH

		3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
32W	3807 lm	113603.01	3892 lm 113604.01

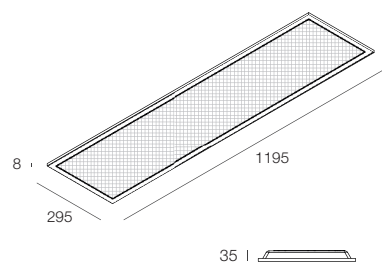

BACKLIT 1200x300


		3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
32W	3987 lm	113605.01	4080 lm 113606.01

DALI-PUSH

		3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
32W	3987 lm	113607.01	4080 lm 113608.01

BACKLIT

ACCESSORI ACCESSORIES




KIT MOLLE PER INSTALLAZIONE AD INCASSO
Per versioni 600x600 e 1200x300, per installazione in battuta in cartongesso di spessore 10-12,5 mm.

113609.99



SPRINGS KIT FOR RECESSED INSTALLATION
For 600x600 and 1200x300 versions, for installation by frame contrasting in plasterboard of thickness 10-12,5 mm.

600 x 600	1200 x 300
H 50	H 50
L 575	L 1175
W 575	W 275




KIT DI ALIMENTAZIONE IN EMERGENZA
Per versioni 600x600 e 1200x300. Completo di connettori polarizzati per il collegamento dell'alimentatore.

KIT FOR EMERGENCY
For 600x600 and 1200x300 versions. Polarized connectors included.

	TIME	CHARGE	A (mm)	D (mm)	H (mm)	L (mm)
1020A4.99	1h	12h	38	44	25	164
1020A5.99	3h	12h	38	44	25	164

Flusso in emergenza - Emergency flux	1h	3h
BACKLIT	32W	12% 5%

Sorgenti LED con lenti side light / LED sources with side light lenses
Pannello posteriore in acciaio stampato / Back panel in pressed steel

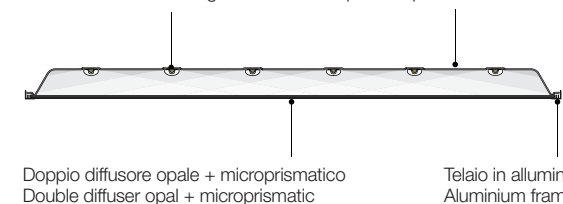

Doppio diffusore opale + microprismatico / Double diffuser opal + microprismatic

Telaio in alluminio / Aluminium frame

