




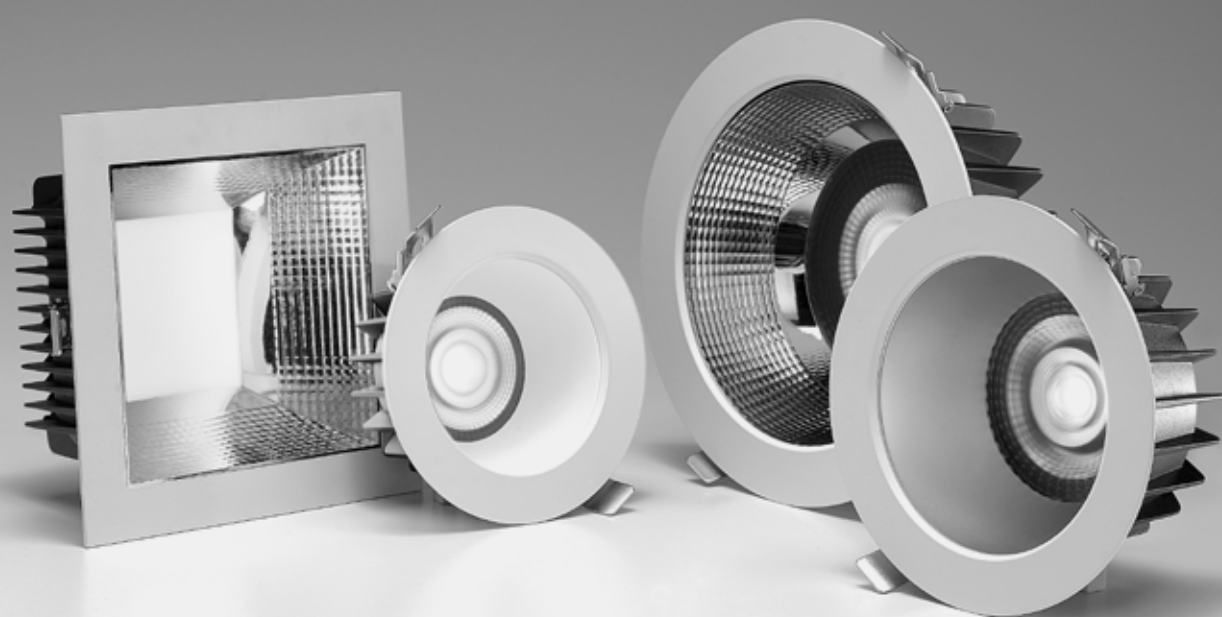

NIK

NIK è una famiglia di downlight LED Novalux dalla grande varietà di potenze, fasci e ottiche, tra cui quella a UGR controllato, che rende questa luce a incasso una soluzione illuminotecnica estremamente versatile. Sorgente LED arretrata, e alta resa cromatica, fanno sì che questo faretto da incasso sia perfetto per spazi commerciali e ambienti di lavoro.

NIK is a family of Novalux LED downlights with a wide variety of wattages, beams and optics, including controlled UGR (Unified Glare Rating), making this recessed light an extremely versatile lighting solution. Recessed LED source, and high colour rendering make sure that this recessed spotlight is ideal for commercial spaces and workplaces.

NIK

- **POTENZE 16W / 22W / 32W**

POWER 16W / 22W / 32W


- **FASCI 24° / 36° / 60°**

BEAM 24° / 36° / 60°

- **RIFLETTORI BIANCO / GRIGIO / GRIGIO METALLIZZATO UGR<19**

OPTICS WHITE / GREY / GREY METALLIZED UGR<19

- **CRI>90**

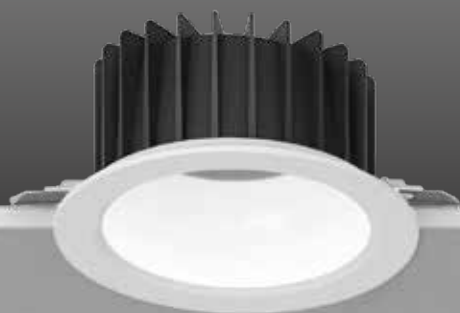

Ø 228 mm



Ø 172 mm




Ø 145 mm

NIK TONDO

Riflettore
BIANCO

NIK ROUND

WHITE
reflector

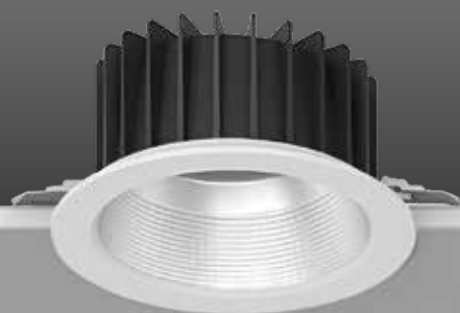

Ø 228 mm



Ø 172 mm




Ø 145 mm

NIK TONDO

Riflettore
UGR<19

NIK ROUND

UGR<19
reflector

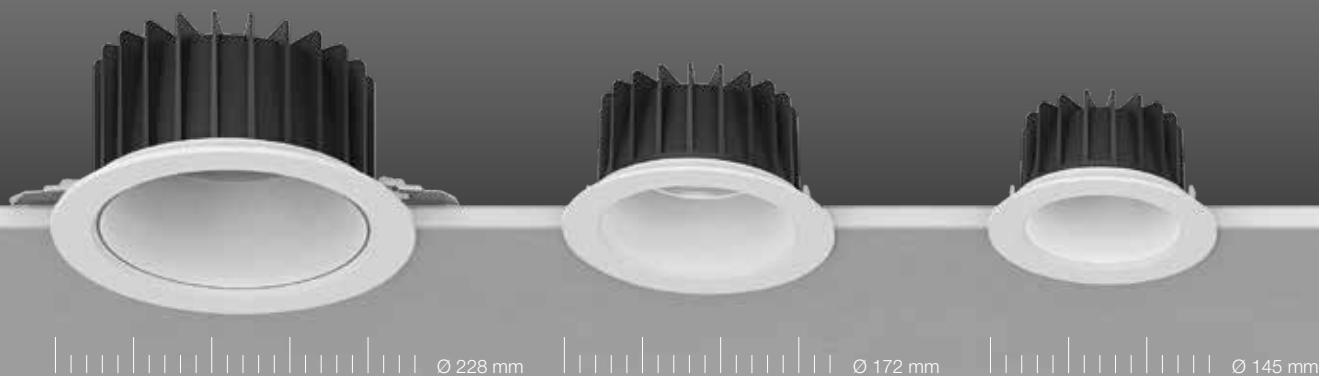**NIK TONDO**

Riflettore
GRIGIO

NIK ROUND

GREY
reflector

**NIK QUADRATO**

Riflettore
UGR<19

NIK SQUARE

UGR<19
reflector

NIK



Downlight LED tondo o quadrato per installazione ad incasso in battuta in controsoffitto, completo di molle in acciaio armonico per spessori da 5-15 mm.
Elevate prestazioni, resa cromatica CRI>90 e alto comfort visivo grazie alla sorgente COB recessa e alle lenti in PMMA ad alto rendimento.
Cornice in lega di alluminio verniciata bianca, dissipatore verniciato nero.
Riflettore in polycarbonato verniciato bianco oppure grigio, o metallizzato lucido in alto vuoto in alluminio super puro 99% a seconda della versione.
Alimentazione elettronica inclusa, da collocare a lato del prodotto.


Downlight LED round or square for recessed installation in plasterboard, complete with spring in harmonic steel for thickness 5-15 mm. High performance, CRI>90 colour rendering and high visual comfort thanks to the recessed COB source and high-performance PMMA lenses.
Frame in white painted aluminium alloy, black painted heat sink.
Reflector in white or grey painted polycarbonate, or glossy metallized in high vacuum in super pure aluminium 99% depending on the version.
Electronic power supply included, to be placed on the side of the fixture.



* Solo versione DALI/PUSH - Only version DALI/PUSH



NIK TONDO 16W




NIK TONDO
16W
Riflettore
BIANCO

NIK ROUND
16W
WHITE
reflector

			3000K ☐		4000K ☐
16W	24°	1613 lm	107901.01	1714 lm	107904.01
16W	36°	1554 lm	107902.01	1653 lm	107905.01
16W	60°	1706 lm	107903.01	1814 lm	107906.01

DALI-PUSH

			3000K ☐		4000K ☐
16W	24°	1613 lm	107945.01	1714 lm	107948.01
16W	36°	1554 lm	107946.01	1653 lm	107949.01
16W	60°	1706 lm	107947.01	1814 lm	107950.01




NIK TONDO
16W
Riflettore
GRIGIO

NIK ROUND
16W
GREY
reflector

			3000K ☒		4000K ☒
16W	24°	1593 lm	107901.03	1694 lm	107904.03
16W	36°	1536 lm	107902.03	1633 lm	107905.03
16W	60°	1693 lm	107903.03	1800 lm	107906.03

DALI-PUSH

			3000K ☒		4000K ☒
16W	24°	1593 lm	107945.03	1694 lm	107948.03
16W	36°	1536 lm	107946.03	1633 lm	107949.03
16W	60°	1693 lm	107947.03	1800 lm	107950.03



NIK TONDO
16W
Riflettore
UGR<19

NIK ROUND
16W
UGR<19
reflector




			3000K ☒		4000K ☒
16W	24°	1601 lm	107901.97	1702 lm	107904.97
16W	36°	1539 lm	107902.97	1636 lm	107905.97
16W	60°	1700 lm	107903.97	1807 lm	107906.97

DALI-PUSH

			3000K ☒		4000K ☒
16W	24°	1601 lm	107945.97	1702 lm	107948.97
16W	36°	1539 lm	107946.97	1636 lm	107949.97
16W	60°	1700 lm	107947.97	1807 lm	107950.97


NIK TONDO 22W



NIK TONDO
22W
Riflettore
BIANCO

NIK ROUND
22W
WHITE
reflector


		3000K		4000K	
22W	24°	2026 lm	107907.01	2231 lm	107910.01
22W	36°	2028 lm	107908.01	2233 lm	107911.01
22W	60°	2189 lm	107909.01	2411 lm	107912.01
DALI-PUSH					
		3000K		4000K	
22W	24°	2026 lm	107951.01	2231 lm	107954.01
22W	36°	2028 lm	107952.01	2233 lm	107955.01
22W	60°	2189 lm	107953.01	2411 lm	107956.01



NIK TONDO
22W
Riflettore
GRIGIO

NIK ROUND
22W
GREY
reflector

		3000K		4000K	
22W	24°	2007 lm	107907.03	2211 lm	107910.03
22W	36°	2008 lm	107908.03	2212 lm	107911.03
22W	60°	2169 lm	107909.03	2389 lm	107912.03
DALI-PUSH					
		3000K		4000K	
22W	24°	2007 lm	107951.03	2211 lm	107954.03
22W	36°	2008 lm	107952.03	2212 lm	107955.03
22W	60°	2169 lm	107953.03	2389 lm	107956.03




NIK TONDO
22W
Riflettore
UGR<19

NIK ROUND
22W
UGR<19
reflector



		3000K		4000K	
22W	24°	2009 lm	107907.97	2213 lm	107910.97
22W	36°	1996 lm	107908.97	2198 lm	107911.97
22W	60°	2179 lm	107909.97	2400 lm	107912.97
DALI-PUSH					
		3000K		4000K	
22W	24°	2009 lm	107951.97	2213 lm	107954.97
22W	36°	1996 lm	107952.97	2198 lm	107955.97
22W	60°	2179 lm	107953.97	2400 lm	107956.97

NIK TONDO 32W

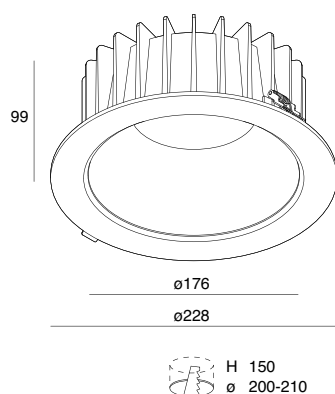


**NIK TONDO
32W**
Riflettore
BIANCO

**NIK ROUND
32W**
WHITE
reflector

			3000K 		4000K 
32W	24°	2910 lm	107913.01	3172 lm	107916.01
32W	36°	3006 lm	107914.01	3276 lm	107917.01
32W	60°	3041 lm	107915.01	3314 lm	107918.01

DALI-PUSH

			3000K 		4000K 
32W	24°	2910 lm	107957.01	3172 lm	107960.01
32W	36°	3006 lm	107958.01	3276 lm	107961.01
32W	60°	3041 lm	107959.01	3314 lm	107962.01

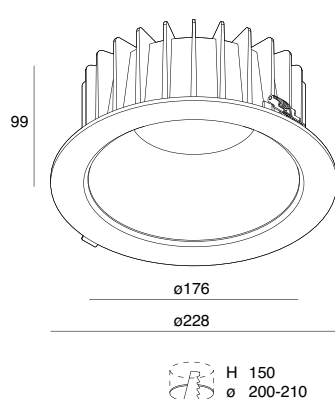


**NIK TONDO
32W**
Riflettore
GRIGIO

**NIK ROUND
32W**
GREY
reflector

			3000K 		4000K 
32W	24°	2894 lm	107913.03	3154 lm	107916.03
32W	36°	2983 lm	107914.03	3251 lm	107917.03
32W	60°	3022 lm	107915.03	3293 lm	107918.03

DALI-PUSH

			3000K 		4000K 
32W	24°	2894 lm	107957.03	3154 lm	107960.03
32W	36°	2983 lm	107958.03	3251 lm	107961.03
32W	60°	3022 lm	107959.03	3293 lm	107962.03

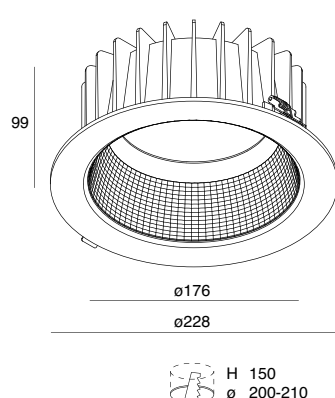

**NIK TONDO
32W**
Riflettore
UGR<19

**NIK ROUND
32W**
UGR<19
reflector




			3000K 		4000K 
32W	24°	2898 lm	107913.97	3159 lm	107916.97
32W	36°	2998 lm	107914.97	3267 lm	107917.97
32W	60°	3043 lm	107915.97	3316 lm	107918.97

DALI-PUSH

			3000K 		4000K 
32W	24°	2898 lm	107957.97	3159 lm	107960.97
32W	36°	2998 lm	107958.97	3267 lm	107961.97
32W	60°	3043 lm	107959.97	3316 lm	107962.97

NIK 32W

ACCESSORI ACCESSORIES

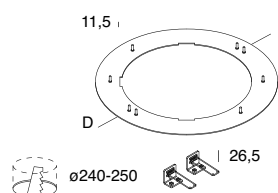


ADATTATORE PER
NIK 32W
per installazione in foro
da incasso 240-250
mm, con molle.

ADAPTOR FOR
NIK 32W
For recessed installation
hole 240-250 mm, clips
included.

	D (mm)
11814.01	280

NIK QUADRATO

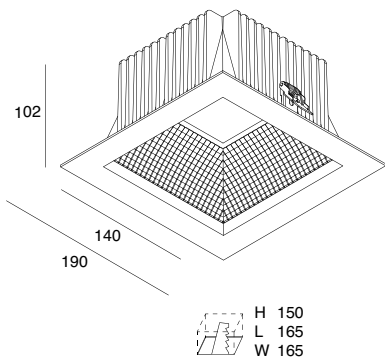

NIK QUADRATO
32W
Riflettore
UGR<19


NIK SQUARE
32W
UGR<19
reflector

UGR
<19

		3000K		4000K	
29W	60°	2488 lm	107937.97	2517 lm	107938.97
DALI-PUSH					
29W	60°	2488 lm	107963.97	2517 lm	107964.97

NIK

ACCESSORI
ACCESSORIES

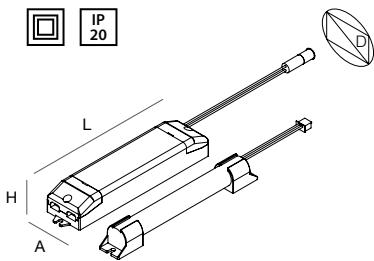

KIT DI EMERGENZA
da installare
sul controsoffitto
a lato del prodotto.

EMERGENCY KIT
to place on the
false ceiling
next to the fixture.

	TIME	CHARGE	A (mm)	D (mm)	H (mm)	L (mm)
1020A4.99	1h	12h	38	44	25	164
1020A5.99	3h	12h	38	44	25	164
Flusso in emergenza Emergency flux	1h	3h				
NIK 16W	26%	10%				
NIK 22W	19%	8%				
NIK 32W	13%	5%				
NIK QUADRATO	14%	5%				

