





## SHOW

SHOW è un modulo LED estremamente piatto e performante per installazione sul binario elettrificato Novalux ALL-TRACK, ideale per l'illuminazione di spazi commerciali. Nella versione standard o con alette direzionabili per illuminare al meglio le superfici verticali, lo contraddistinguono il design dal ridotto impatto visivo, l'alta resa cromatica, e la possibilità di scegliere la potenza tramite selettore integrato nel prodotto.


SHOW is an extremely flat and high-performance LED module for the installation on the Novalux ALL-TRACK electrified track, ideal for the lighting of commercial spaces. In the standard version or with adjustable fins to illuminate the vertical surfaces, its distinguishing features are the design with reduced visual impact, the high colour rendering as well as the ability to choose the power via the selector, which is integrated into the product.

# SHOW



Apparecchio lineare per installazione a binario elettrificato trifase a 7 poli All-Track. (Non idoneo per binario ad incasso). Potenza settabile tramite selettore. Versione fissa provvista di ottiche a lenti lineari in PMMA ad emissione diffusa 90°. Versione orientabile provvista di pannello centrale in PC micro-prismatizzato ad emissione diffusa 120° e di 2 alette orientabili di 30° con ottiche a lenti lineari in PMMA.  
Corpo in acciaio verniciato a polvere bianca.  
Alimentazione elettronica dimmerabile DALI 220-240V 50/60 Hz, integrata nell'adattatore.

Linear LED fixture for installation on 7-pole three-phase electrified All-Track. (Not suitable for recessed track). Selectable LED power. Fixed version equipped with linear PMMA lens optics with diffused emission 90°. Tilttable version with central panel in micro-prismatic PC with diffused emission 120° and 2 adjustable fins of 30° with linear PMMA lens optics.  
White powder coated steel body.  
Dimmable electronic power supply DALI 220-240V 50/60 Hz, integrated into the adapter.

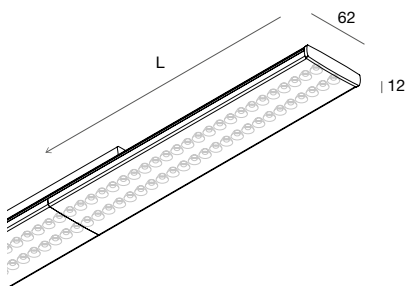


**DALI**

	L (mm)	3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
35W / 40W / 45W / 50W	1500	<b>110401.01</b>	<b>110402.01</b>

Potenza selezionabile con selettore	35W	40W	45W	50W
3000K	4515	5160	5805	6450
Selectable LED power	4000K	4620	5280	5940 / 6600

## SHOW



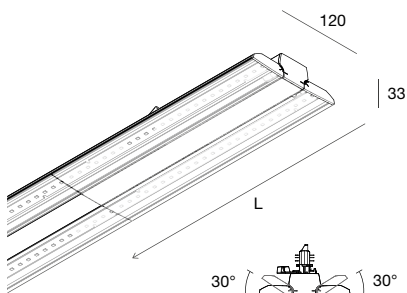


**DALI**

	L (mm)	3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
35W / 40W / 45W / 50W	1500	<b>110403.01</b>	<b>110404.01</b>

Potenza selezionabile con selettore	35W	40W	45W	50W
3000K	5103	5832	6575	7313
Selectable LED power	4000K	5228	5975	6736 / 7493

## SHOW ORIENTABILE SHOW TILTTABLE

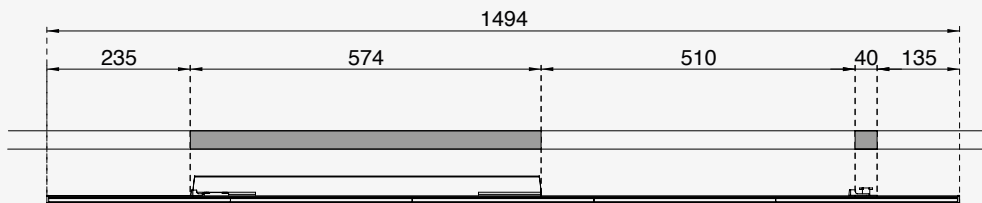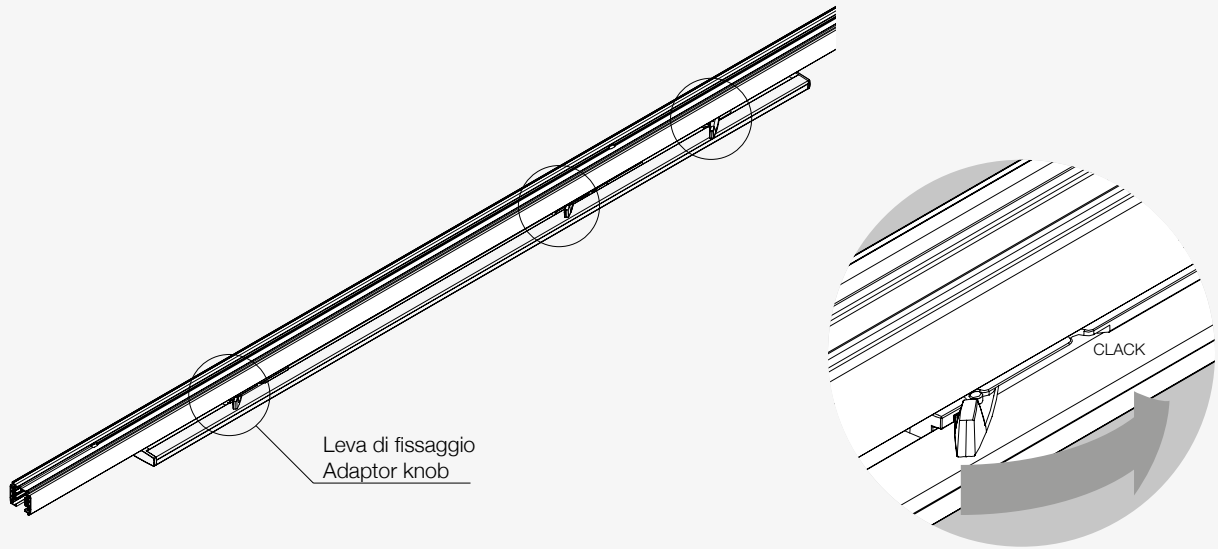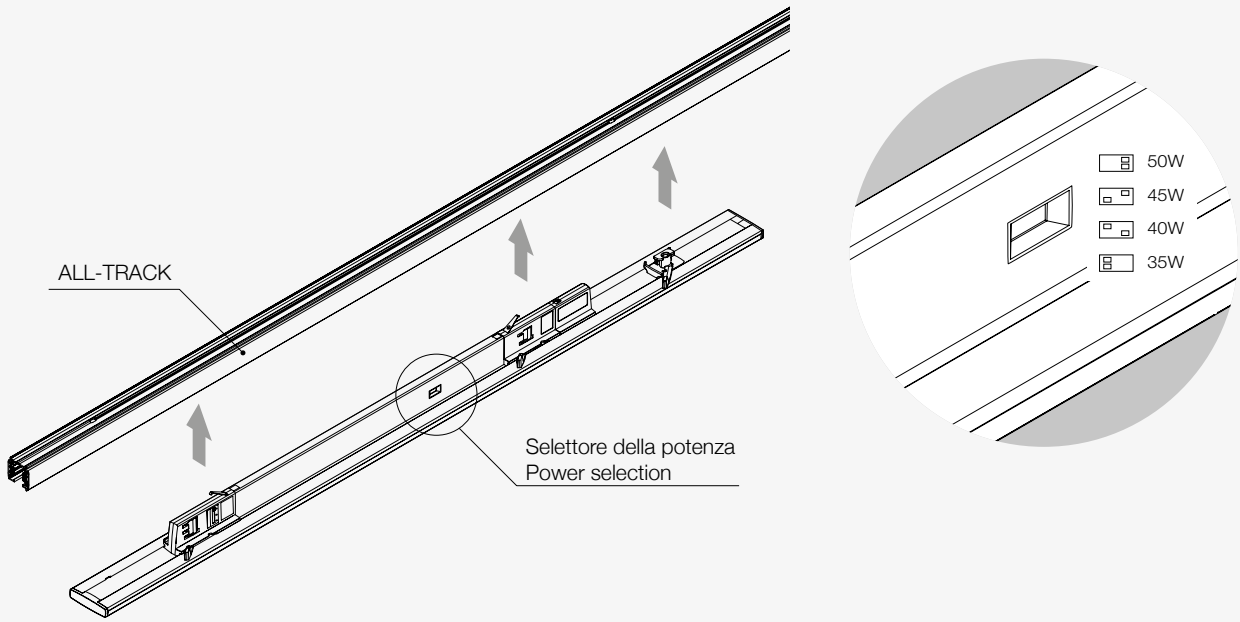

ZONA DEL BINARIO DOVE NON E' POSSIBILE INSTALLARE UN GIUNTO LINEARE  
 TRACK AREA WHERE IS NOT POSSIBLE TO INSERT A LINEAR JOINT