






## SLIM

Il faretto LED SLIM è la soluzione perfetta per quegli spazi che necessitano di un'illuminazione affidabile, semplice e di facile installazione. Ingombro minimo ed efficienza, fanno di SLIM un classico intramontabile della famiglia di downlight Novalux.


SLIM LED spotlight is the perfect solution for spaces that need reliable, simple lighting that is easy to install. Its compact size and efficiency make SLIM a timeless classic in the Novalux downlight family.

# SLIM

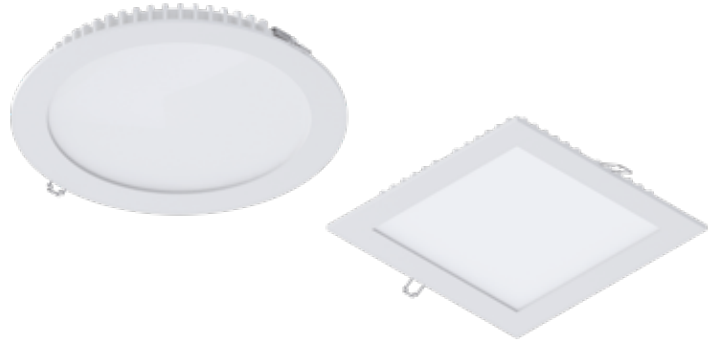

Apparecchio LED per installazione ad incasso in battuta in controsoffitto.  
Cornice e corpo dissipante in lega di alluminio pressofusa verniciata bianca.  
Schermo diffusore in policarbonato opale e molle in acciaio armonico per il fissaggio a controsoffitto di spessore fino a 15 mm. Alimentazione elettronica inclusa, da collocare a lato del prodotto.


LED fixture for false ceiling recessed installation.  
Frame and dissipater made of die-casting aluminum alloy, white painted.  
Diffuser made of opal polycarbonate and clips made of harmonic steel, for fixing to the false ceiling of thickness up to 15 mm. Electronic driver included, to be placed next to the fixture.



## SLIM TONDO SLIM ROUND

	Ø (mm)	H (mm)		3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
9W	125	25	950 lm	<b>11820.01</b>	970 lm <b>11819.01</b>
13W	160	26	1402 lm	<b>11818.01</b>	1496 lm <b>11817.01</b>
20W	230	28	2199 lm	<b>11816.01</b>	2360 lm <b>11815.01</b>

9W	13W	20W
H 100	H 100	H 100
Ø 110	Ø 145	Ø 210-215




## SLIM QUADRATO SLIM SQUARE

	L (mm)	H (mm)		3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
9W	110	24	882 lm	<b>11826.01</b>	959 lm <b>11825.01</b>
13W	160	26	1442 lm	<b>11824.01</b>	1524 lm <b>11823.01</b>
20W	230	28	2222 lm	<b>11822.01</b>	2363 lm <b>11821.01</b>

9W	13W	20W
H 100	H 100	H 100
L 95	L 145	L 210-215
W 95	W 145	W 210-215

**SLIM**


**ACCESSORI  
ACCESSORIES**



ADATTATORE PER SLIM TONDO 20W  
per installazione in foro da incasso  
240-250 mm, con molle.

ADAPTOR FOR SLIM ROUND 20W  
For recessed installation hole  
240-250 mm, clips included.


	D (mm)
<b>11814.01</b>	280



ALIMENTATORE ELETTRONICO  
DIMMERABILE 220-240V 50/60Hz  
Per il collegamento in serie di max  
2 Slim 9W, 1 Slim 13W o 1 Slim 20W.

ELECTRONIC DIMMABLE  
DRIVER 220-240V 50/60Hz  
For connection in series of max  
2 Slim 9W, 1 Slim 13W or 1 Slim 20W.

	A (mm)	D (mm)	H (mm)	L (mm)
<b>101333.99</b>	25W	52	55	23 120

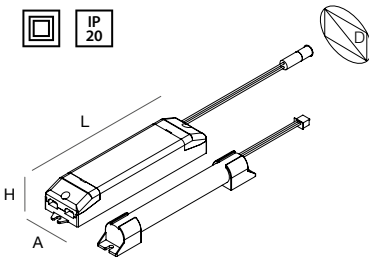

KIT DI EMERGENZA  
da installare sul controsoffitto  
a lato del prodotto.

EMERGENCY KIT  
to place on the false ceiling  
next to the fixture.

	TIME CHARGE	A (mm)	D (mm)	H (mm)	L (mm)
<b>18004.99</b>	1h 12h	38	44	25	164
<b>18005.99</b>	3h 12h	38	44	25	164
Flusso in emergenza Emergency flux	1h 3h				
<b>SLIM 9W</b>	<b>53%</b>	<b>21%</b>			
<b>SLIM 13W</b>	<b>35%</b>	<b>14%</b>			
<b>SLIM 20W</b>	<b>22%</b>	<b>9%</b>			