




NEW

PATTY



Apparecchio di illuminazione con corpo in vetro soffiato extra chiaro trasparente, con calotta superiore in acciaio verniciato a polvere nero. Da completare con cavo provvisto di portalampada con attacco E27 e con accessori BRIDGE SYSTEM per realizzare composizioni a sospensione singole o multiple.


Lighting fixture with a body in transparent extra-clear blown glass and an upper cap in black powder-coated steel. To be completed with a cable featuring an E27 socket and BRIDGE SYSTEM accessories for creating single or multiple suspension compositions.


CEILING
SUSPENSION

PATTY S

Cavo con portalampada E27 e rosone da ordinare a parte

Cable with lamp holder E27 and canopy to be ordered separately



113901.00


PATTY M

Cavo con portalampada E27 e rosone da ordinare a parte

Cable with lamp holder E27 and canopy to be ordered separately



113902.00


NEW

SELMA



Apparecchio di illuminazione con corpo in vetro soffiato extra chiaro trasparente. Da completare con cavo provvisto di portalampada con attacco E27 e con accessori BRIDGE SYSTEM per realizzare composizioni a sospensione singole o multiple.

Lighting fixture with a body in transparent extra-clear blown glass. To be completed with a cable featuring an E27 socket and BRIDGE SYSTEM accessories for creating single or multiple suspension compositions.




SELMA S

Cavo con portalampada E27 e rosone da ordinare a parte

Cable with lamp holder E27 and canopy to be ordered separately




114001.00


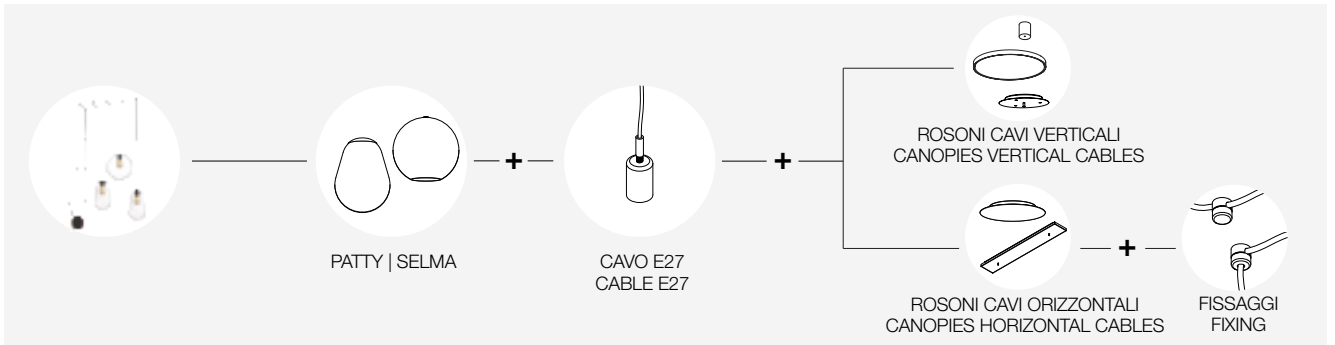
SELMA M

Cavo con portalampada E27 e rosone da ordinare a parte

Cable with lamp holder E27 and canopy to be ordered separately




114002.00




**PATTY
SELMA**

**ACCESSORI
ACCESSORIES**



ROSSONI BRIDGE SYSTEM
Abbinare uno o più apparecchi ai rosoni Bridge System, per sospensioni singole o multiple.
Pag. 348


BRIDGE SYSTEM CANOPIES
Combine one or more fixtures with the Bridge System canopies, for single or multiple suspensions.
Pag. 348



CAVO CON PORTALAMPADA E27
Portalampada in acciaio verniciato bianco, nero o placcato in ottone. Cavo rivestito con guaina bianca o nera.
1x E27 max 25W non inclusa

	□	■		
112918. __ 01 02			E27	max 25W
112918. __ 16			E27	max 25W

CABLE WITH LAMP HOLDER E27
White painted steel, black, or brass-plated lamp holder. Cable coated with white or black sheath.
1x E27 max 25W not included



FISSAGGIO CAVO (5 pz)
In acciaio verniciato o in ottone massiccio.
Da usare obbligatoriamente con rosoni a cavi orizzontali, per fissare e tendere i cavi su soffitto o parete. Viti di montaggio non incluse.

	□	■	VERSION
112920. __ 01 02			A
112921. __ 01 02			B

CABLE FIXING (5 pcs)
Made of painted steel or solid brass.
To be used mandatory with canopies with horizontal cables, to secure and tension the cable on the ceiling or wall.
Mounting screws not included.



ROSONI BRIDGE SYSTEM BRIDGE SYSTEM CANOPIES

Collins SP
Pag. 334

Crystal
Pag. 338


Patty
Pag. 340

Selma
Pag. 340

Miss SP
Pag. 344

Rosoni singoli, multipli lineari e multipli circolari in acciaio verniciato, da combinare con uno o più apparecchi BRIDGE SYSTEM
Single, multiple linear and multiple circular canopies in painted steel, to be combined with one or more BRIDGE SYSTEM fixtures

ROSONI SINGOLI SINGLE CANOPIES



ROSONE A


Plafone. Da abbinare a
1 apparecchio Bridge System



112905. __ 01 02 23 24

CANOPY A

Ceiling. To be combined
with 1 Bridge System fixture



ROSONE B



Incasso. Da abbinare a
1 apparecchio Bridge System



112906. __ 01 02 23 24

CANOPY B

Recessed. To be combined with
1 Bridge System fixture



ROSONE C

Binario. Da abbinare a
1 apparecchio Bridge System





112922. __ 01 02

CANOPY C

Track. To be combined with
1 Bridge System fixture

ROSONI MULTIPLI LINEARI MULTIPLE LINEAR CANOPIES



ROSONE D



Per 3 cavi verticali ad interdistanza fissa.
Da abbinare a 3 apparecchi Bridge System, con
unica accensione.



112907. __ 01 02 23 24

CANOPY D

For 3 vertical cables with fix spacing. To be
combined with 3 Bridge System fixtures, with single
switch.



ROSONE E



Per max 12 cavi verticali ad interdistanza libera.
Da abbinare a max 12 apparecchi Bridge System,
suddivisibili in 3 accensioni da 4 unità.



112917. __ 01 02

CANOPY E

For max 12 vertical cables with free spacing.
To be combined with max 12 Bridge System
fixtures, divisible into 3 separate switches, each
controlling 4 units.



ROSONE F

Per max 12 cavi orizzontali ad interdistanza libera.
Da abbinare a max 12 apparecchi Bridge System,
suddivisibili in 3 accensioni da 4 unità. Prevedere
fissaggi cavi, da ordinare a parte.






112916. __ 01 02

CANOPY F

For max 12 horizontal cables with free spacing.
To be combined with max 12 Bridge System
fixtures, divisible into 3 separate switches, each
controlling 4 units. Provide cable fixings, to be
ordered separately.

ROSONI MULTIPLI CIRCOLARI MULTIPLE CIRCULAR CANOPIES



ROSONE G



Per 3 cavi verticali ad interdistanza fissa.
Da abbinare a 3 apparecchi Bridge System,
con unica accensione.

CANOPY G

For 3 vertical cables with fix spacing.
To be combined with 3 Bridge System fixtures,
with single switch.



112908. __ 01 02 23 24



ROSONE H



Per max 4 cavi orizzontali ad interdistanza libera.
Da abbinare a max 4 apparecchi Bridge System,
in unica accensione.
Prevedere fissaggi cavi, da ordinare a parte.

CANOPY H

For max 4 horizontal cables with free spacing.
To be combined with max 4 Bridge System
fixtures, single switch.
Provide cable fixings, to be ordered separately.



112913. __ 01 02



ROSONE I



Per max 12 cavi orizzontali ad interdistanza
libera. Da abbinare a max 12 apparecchi
Bridge System, suddivisibili in 3 accensioni
da 4 unità. Prevedere fissaggi cavi, da
ordinare a parte.

CANOPY I

For max 12 horizontal cables with free
spacing. To be combined with max 12
Bridge System fixtures, divisible into 3
separate switches, each controlling 4 units.
Provide cable fixings, to be ordered separately.



112914. __ 01 02



ROSONE L

Per max 12 cavi verticali ad interdistanza libera.
Da abbinare a max 12 apparecchi Bridge System,
suddivisibili in 3 accensioni da 4 unità.

CANOPY L

For max 12 vertical cables with free spacing.
To be combined with max 12 Bridge System
fixtures, divisible into 3 separate switches, each
controlling 4 units.



112915. __ 01 02