





# SHOW

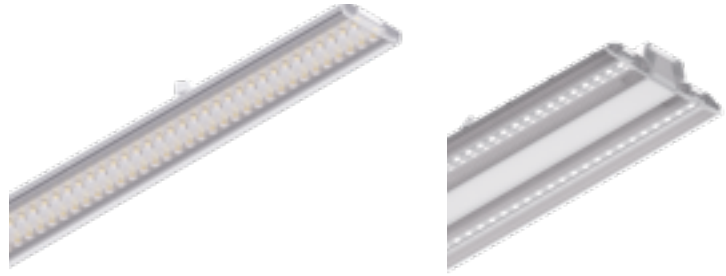


Apparecchio lineare per installazione a binario elettrificato trifase a 7 poli All-Track. (Non idoneo per binario ad incasso). Potenza settabile tramite selettore. Versione fissa provvista di ottiche a lenti lineari in PMMA ad emissione diffusa 90°. Versione orientabile provvista di pannello centrale in PC micro-prismatizzato ad emissione diffusa 120° e di 2 alette orientabili di 30° con ottiche a lenti lineari in PMMA.  
Corpo in acciaio verniciato a polvere bianca.  
Alimentazione elettronica dimmerabile DALI 220-240V 50/60 Hz, integrata nell'adattatore.

Linear LED fixture for installation on 7-pole three-phase electrified All-Track. (Not suitable for recessed track). Selectable LED power. Fixed version equipped with linear PMMA lens optics with diffused emission 90°. Tiltable version with central panel in micro-prismatic PC with diffused emission 120° and 2 adjustable fins of 30° with linear PMMA lens optics.  
White powder coated steel body.  
Dimmable electronic power supply DALI 220-240V 50/60 Hz, integrated into the adapter.

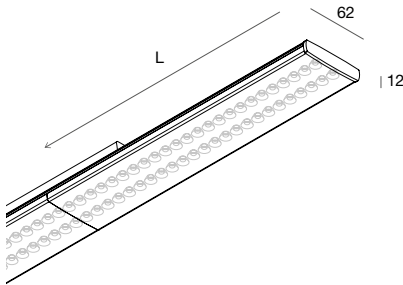

DALI		L (mm)	3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
35W / 40W / 45W / 50W		1500	<b>110401.01</b>	<b>110402.01</b>
Potenza selezionabile con selettore		35W 40W 45W 50W		
		3000K	4515 / 5160 / 5805 / 6450 lm	
Selectable LED power		4000K	4620 / 5280 / 5940 / 6600 lm	

## SHOW

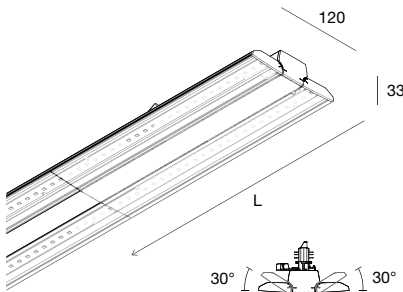

DALI		L (mm)	3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
35W / 40W / 45W / 50W		1500	<b>110403.01</b>	<b>110404.01</b>
Potenza selezionabile con selettore		35W 40W 45W 50W		
		3000K	5103 / 5832 / 6575 / 7313 lm	
Selectable LED power		4000K	5228 / 5975 / 6736 / 7493 lm	

## SHOW ORIENTABILE SHOW TILTABILE

