




SHOW

CCT SHOW



Apparecchio lineare per installazione a binario elettrificato trifase a 7 poli All-Track. (Non idoneo per binario ad incasso). Potenza e temperatura di colore della sorgente selezionabili tramite selettore. Ottiche a lenti lineari in PMMA ad emissione diffusa 90°. Corpo in acciaio verniciato a polvere bianca. Alimentazione elettronica dimmerabile DALI 220-240V 50/60 Hz, integrata nell'adattatore.

Linear LED fixture for installation on 7-pole three-phase electrified All-Track. (Not suitable for recessed track). Source power and color temperature selectable via switch. Linear PMMA lens optics with diffused emission 90°. White powder coated steel body. Dimmable electronic power supply DALI 220-240V 50/60 Hz, integrated into the adapter.

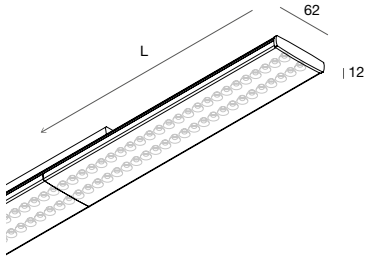

DALI

	L (mm)	3000K-4000K <input type="checkbox"/>
45W / 50W / 55W / 60W	1500	110405.01

Potenza e temperatura di colore selezionabili tramite selettore	CCT	45W	50W	55W	60W
3000K		7106	7700	8343	8993 lm
4000K		7219	7894	8562	9242 lm



Power and color temperature of the source selectable through a selector

SHOW TILTABLE



Apparecchio lineare per installazione a binario elettrificato trifase a 7 poli All-Track. (Non idoneo per binario ad incasso). Potenza settabile tramite selettore. Pannello centrale in PC microprismatizzato ad emissione diffusa 120° e di 2 alette orientabili di 30° con ottiche a lenti lineari in PMMA. Corpo in acciaio verniciato a polvere bianca. Alimentazione elettronica dimmerabile DALI 220-240V 50/60 Hz, integrata nell'adattatore.

Linear LED fixture for installation on 7-pole three-phase electrified All-Track. (Not suitable for recessed track). Selectable LED power. Central panel in micro-prismatic PC with diffused emission 120° and 2 adjustable fins of 30° with linear PMMA lens optics. White powder coated steel body. Dimmable electronic power supply DALI 220-240V 50/60 Hz, integrated into the adapter.

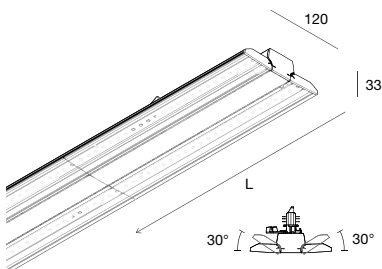

DALI

	L (mm)	3000K <input type="checkbox"/>	4000K <input type="checkbox"/>
35W / 40W / 45W / 50W	1500	110403.01	110404.01

Potenza selezionabile con selettore	CCT	35W	40W	45W	50W
3000K		5103	5832	6575	7313 lm
4000K		5228	5975	6736	7493 lm

Power selectable through a selector