



SIX B



NEW

SIX B



Profilo LED esagonale a luce diretta-indiretta, dotato di doppia accensione, per installazione a sospensione. Disponibile nella versione con schermo opale o con micro ottiche. Corpo in estruso di alluminio e rosone in lega di alluminio pressofusa, verniciati a polvere. Cavi di sospensione in acciaio inclusi, rosone con cavo di alimentazione da ordinare a parte. Alimentazione elettronica integrata nel profilo, 220-240V 50-60Hz.

Hexagonal LED profile with direct-indirect light emission, equipped for dual switching, designed for suspended installation. Available with opal diffuser or micro-optics. Body made of extruded aluminum, with a canopy in die-cast aluminum alloy, both powder-coated. Steel suspension cables included; canopy with power cable to be ordered separately. Electronic power supply integrated into the profile, 220-240V 50-60Hz.

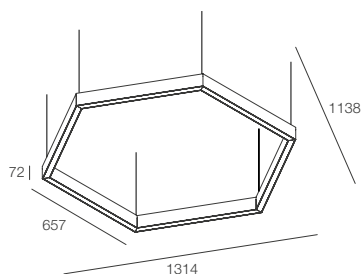


SIX B OPALE

Include schermi in PC per emissione diretta e indiretta.

SIX B OPAL

Includes PC diffusers for both direct and indirect emission.

	2700K	3000K	4000K	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
105W 9560 lm	114501 ...	9896 lm 114502 ...	10718 lm 114503 ...	01	02	20	21
DALI-PUSH							
	2700K	3000K	4000K	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
105W 9560 lm	114507 ...	9896 lm 114508 ...	10718 lm 114509 ...	01	02	20	21

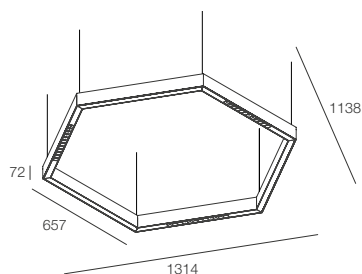

SIX B MICRO OTTICHE


Include riflettori in PC nero matt con lenti in PMMA per emissione diretta e schermi in PC per emissione indiretta.

SIX B MICRO-OPTICS

Includes matte black PC reflectors with PMMA lenses for direct emission, and PC diffusers for indirect emission.

	2700K	3000K	4000K	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
61W 6540 lm	114504 ...	6885 lm 114505 ...	7250 lm 114506 ...	01	02	20	21
DALI-PUSH							
	2700K	3000K	4000K	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
61W 6540 lm	114510 ...	6885 lm 114511 ...	7250 lm 114512 ...	01	02	20	21

SIX B

ACCESSORI
ACCESSORIES

KIT DI ALIMENTAZIONE PER SOSPENSIONE
Cavo con guaina trasparente

POWER SUPPLY KIT FOR SUSPENSION
Cable with transparent sheath

	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	L (mm)	Cavo / Cable (mm ²)
109006 ...	01	02	20	21	3000	3x1,5
109008 ...	01	02	20	21	3000	5x1,5