




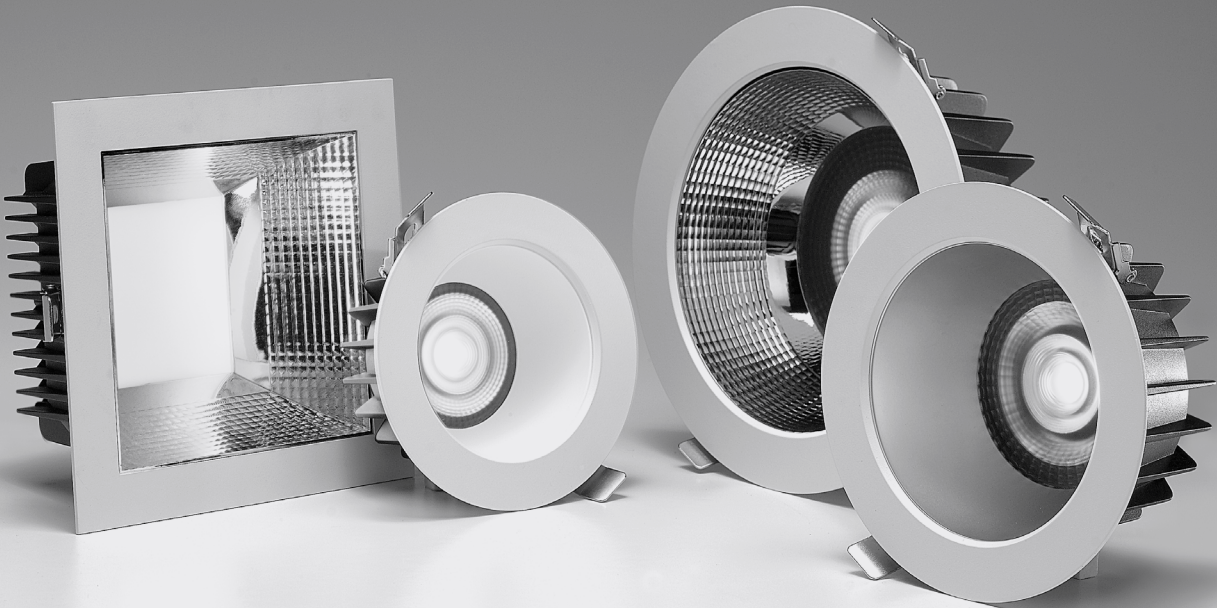

NIK

NIK è una famiglia di downlight LED Novalux dalla grande varietà di potenze, fasci e ottiche, tra cui quella a UGR controllato, che rende questa luce a incasso una soluzione illuminotecnica estremamente versatile. Sorgente LED arretrata, e alta resa cromatica, fanno sì che questo faretto da incasso sia perfetto per spazi commerciali e ambienti di lavoro.

NIK is a family of Novalux LED downlights with a wide variety of wattages, beams and optics, including controlled UGR (Unified Glare Rating), making this recessed light an extremely versatile lighting solution. Recessed LED source, and high colour rendering make sure that this recessed spotlight is ideal for commercial spaces and workplaces.

NIK

- **POTENZE 16W / 22W / 32W**

POWER 16W / 22W / 32W


- **FASCI 24° / 36° / 60°**

BEAM 24° / 36° / 60°

- **RIFLETTORI BIANCO / GRIGIO / GRIGIO METALLIZZATO UGR<19**

OPTICS WHITE / GREY / GREY METALLIZED UGR<19

- **CRI>90**

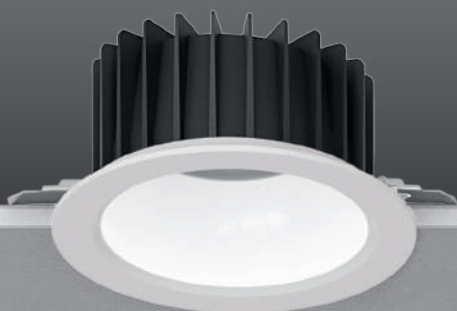

Ø 228 mm



Ø 172 mm




Ø 145 mm

NIK TONDO

Riflettore
BIANCO

NIK ROUND

WHITE
reflector

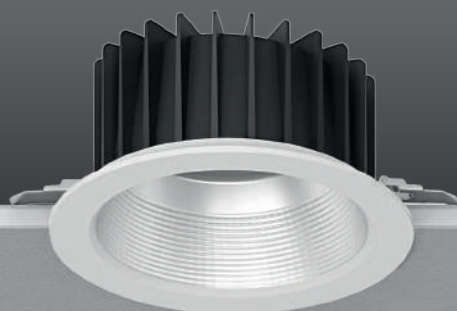

Ø 228 mm



Ø 172 mm




Ø 145 mm

NIK TONDO

Riflettore
UGR<19

NIK ROUND

UGR<19
reflector

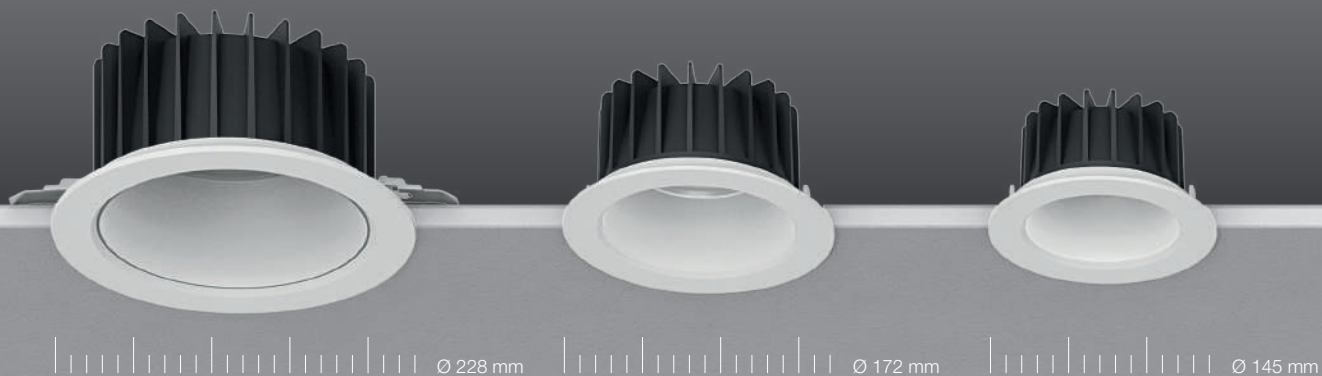**NIK TONDO**

Riflettore
GRIGIO

NIK ROUND

GREY
reflector


**NIK QUADRATO**

Riflettore
UGR<19


NIK SQUARE

UGR<19
reflector

NIK

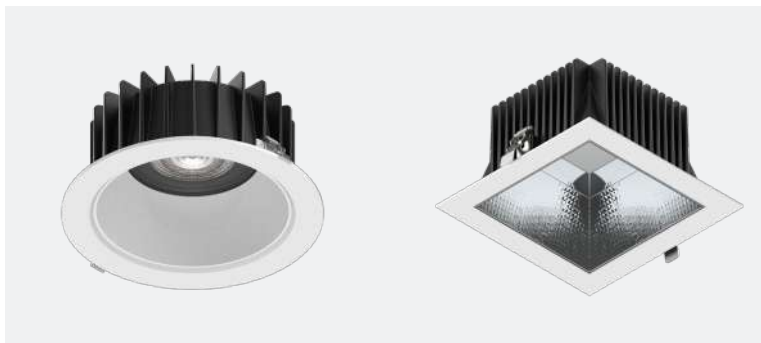

Downlight LED tondo o quadrato per installazione ad incasso in battuta in controsoffitto, completo di molle in acciaio armonico per spessori da 5-15 mm.
 Elevate prestazioni, resa cromatica CRI>90 e alto comfort visivo grazie alla sorgente COB recessa e alle lenti in PMMA ad alto rendimento.
 Cornice in lega di alluminio verniciata bianca, dissipatore verniciato nero.
 Riflettore in policarbonato verniciato bianco oppure grigio, o metallizzato lucido in alto vuoto in alluminio super puro 99% a seconda della versione.
 Alimentazione elettronica inclusa, da collocare a lato del prodotto.




* Solo versione DALI/PUSH/1-10V - Only version DALI/PUSH/1-10V

Downlight LED round or square for recessed installation in plasterboard, complete with spring in harmonic steel for thickness 5-15 mm. High performance, CRI>90 colour rendering and high visual comfort thanks to the recessed COB source and high-performance PMMA lenses.
 Frame in white painted aluminium alloy, black painted heat sink.
 Reflector in white or grey painted polycarbonate, or glossy metallized in high vacuum in super pure aluminium 99% depending on the version.
 Electronic power supply included, to be placed on the side of the fixture.



NIK TONDO 16W




**NIK TONDO
16W**
Riflettore
BIANCO

**NIK ROUND
16W**
WHITE
reflector

POWER	BEAM	FLUX	3000K	FLUX	4000K
16W	24°	1613 lm	107901.01	1714 lm	107904.01
16W	36°	1554 lm	107902.01	1653 lm	107905.01
16W	60°	1706 lm	107903.01	1814 lm	107906.01

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
16W	24°	1613 lm	107919.01	1714 lm	107922.01
16W	36°	1554 lm	107920.01	1653 lm	107923.01
16W	60°	1706 lm	107921.01	1814 lm	107924.01




**NIK TONDO
16W**
Riflettore
GRIGIO

**NIK ROUND
16W**
GREY
reflector

POWER	BEAM	FLUX	3000K	FLUX	4000K
16W	24°	1593 lm	107901.03	1694 lm	107904.03
16W	36°	1536 lm	107902.03	1633 lm	107905.03
16W	60°	1693 lm	107903.03	1800 lm	107906.03

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
16W	24°	1593 lm	107919.03	1694 lm	107922.03
16W	36°	1536 lm	107920.03	1633 lm	107923.03
16W	60°	1693 lm	107921.03	1800 lm	107924.03



**NIK TONDO
16W**
Riflettore
UGR<19

**NIK ROUND
16W**
UGR<19
reflector


UGR
<19

POWER	BEAM	FLUX	3000K	FLUX	4000K
16W	24°	1601 lm	107901.97	1702 lm	107904.97
16W	36°	1539 lm	107902.97	1636 lm	107905.97
16W	60°	1700 lm	107903.97	1807 lm	107906.97

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
16W	24°	1601 lm	107919.97	1702 lm	107922.97
16W	36°	1539 lm	107920.97	1636 lm	107923.97
16W	60°	1700 lm	107921.97	1807 lm	107924.97

NIK TONDO 22W




NIK TONDO
22W
Riflettore
BIANCO

NIK ROUND
22W
WHITE
reflector

POWER	BEAM	FLUX	3000K	FLUX	4000K
22W	24°	2026 lm	☐	2231 lm	☐
22W	36°	2028 lm	☐	2233 lm	☐
22W	60°	2189 lm	☐	2411 lm	☐

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
22W	24°	2026 lm	☐	2231 lm	☐
22W	36°	2028 lm	☐	2233 lm	☐
22W	60°	2189 lm	☐	2411 lm	☐




NIK TONDO
22W
Riflettore
GRIGIO

NIK ROUND
22W
GREY
reflector

POWER	BEAM	FLUX	3000K	FLUX	4000K
22W	24°	2007 lm	☐	2211 lm	☐
22W	36°	2008 lm	☐	2212 lm	☐
22W	60°	2169 lm	☐	2389 lm	☐

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
22W	24°	2007 lm	☐	2211 lm	☐
22W	36°	2008 lm	☐	2212 lm	☐
22W	60°	2169 lm	☐	2389 lm	☐



NIK TONDO
22W
Riflettore
UGR<19

NIK ROUND
22W
UGR<19
reflector

UGR
<19


POWER	BEAM	FLUX	3000K	FLUX	4000K
22W	24°	2009 lm	☐	2213 lm	☐
22W	36°	1996 lm	☐	2198 lm	☐
22W	60°	2179 lm	☐	2400 lm	☐

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
22W	24°	2009 lm	☐	2213 lm	☐
22W	36°	1996 lm	☐	2198 lm	☐
22W	60°	2179 lm	☐	2400 lm	☐

NIK TONDO 32W

99

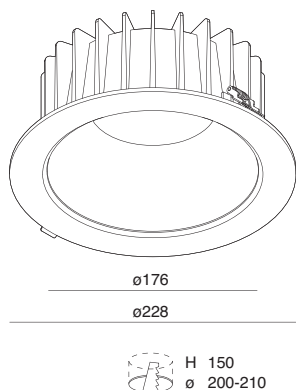

**NIK TONDO
32W**
Riflettore
BIANCO


**NIK ROUND
32W**
WHITE
reflector

POWER	BEAM	FLUX	3000K	FLUX	4000K
32W	24°	2910 lm	☐	3172 lm	☐
32W	36°	3006 lm	☐	3276 lm	☐
32W	60°	3041 lm	☐	3314 lm	☐

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
32W	24°	2910 lm	☐	3172 lm	☐
32W	36°	3006 lm	☐	3276 lm	☐
32W	60°	3041 lm	☐	3314 lm	☐

99

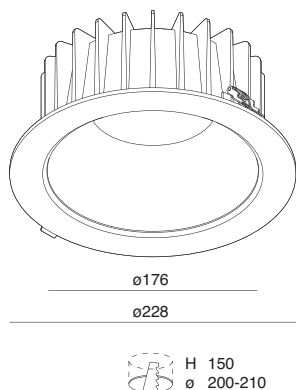

**NIK TONDO
32W**
Riflettore
GRIGIO


**NIK ROUND
32W**
GREY
reflector

POWER	BEAM	FLUX	3000K	FLUX	4000K
32W	24°	2894 lm	☐	3154 lm	☐
32W	36°	2983 lm	☐	3251 lm	☐
32W	60°	3022 lm	☐	3293 lm	☐

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
32W	24°	2894 lm	☐	3154 lm	☐
32W	36°	2983 lm	☐	3251 lm	☐
32W	60°	3022 lm	☐	3293 lm	☐

99

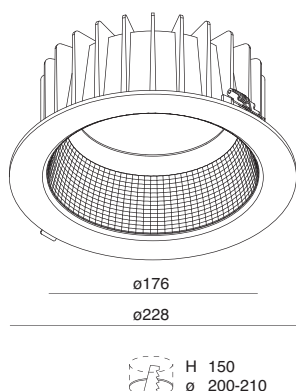

**NIK TONDO
32W**
Riflettore
UGR<19

**NIK ROUND
32W**
UGR<19
reflector




POWER	BEAM	FLUX	3000K	FLUX	4000K
32W	24°	2898 lm	☐	3159 lm	☐
32W	36°	2998 lm	☐	3267 lm	☐
32W	60°	3043 lm	☐	3316 lm	☐

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
32W	24°	2898 lm	☐	3159 lm	☐
32W	36°	2998 lm	☐	3267 lm	☐
32W	60°	3043 lm	☐	3316 lm	☐

NIK 32W

ACCESSORI ACCESSORIES




ADATTATORE PER
NIK 32W
per installazione in foro
da incasso 240-250
mm, con molle.

ADAPTOR FOR
NIK 32W
For recessed installation
hole 240-250 mm, clips
included.

CODE ☐ D (mm)

11814.01 280

NIK QUADRATO

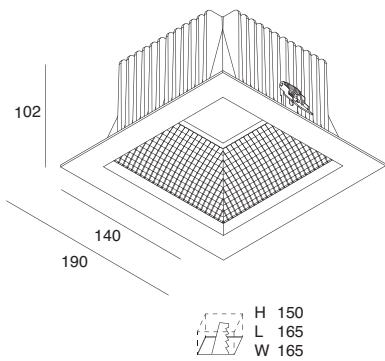

NIK QUADRATO
32W
Riflettore
UGR<19

NIK SQUARE
32W
UGR<19
reflector

UGR
<19


POWER	BEAM	FLUX	3000K	FLUX	4000K
29W	60°	2488 lm	107937.97	2517 lm	107938.97

DALI-PUSH-1-10V

POWER	BEAM	FLUX	3000K	FLUX	4000K
29W	60°	2488 lm	107939.97	2517 lm	107940.97

NIK

ACCESSORI
ACCESSORIES

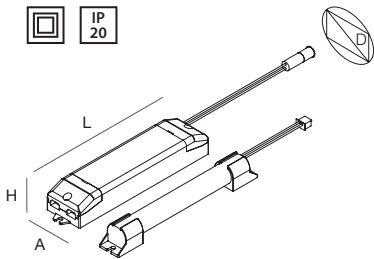

KIT DI EMERGENZA
da installare
sul controsoffitto
a lato del prodotto.

EMERGENCY KIT
to place on the
false ceiling
next to the fixture.

CODE	TIME	CHARGE	A (mm)	D (mm)	H (mm)	L (mm)
1020A4.99	1h	12h	38	44	25	164
1020A5.99	3h	12h	38	44	25	164

Flusso in emergenza Emergency flux	1h	3h
NIK 16W	26%	10%
NIK 22W	19%	8%
NIK 32W	13%	5%
NIK QUADRATO	14%	5%

