


NEWSTEP


Apparecchio LED segnapasso IP65 per installazione ad incasso per cartongesso di 12,5 mm o per muratura con apposito accessorio. Cornice in lega di alluminio verniciata, dissipatore in lega di alluminio e molle in acciaio armonico. Sorgente LED protetta da vetro trasparente. Accessorio per l'installazione in muratura e alimentatore elettronico 350mA o 700mA da ordinare a parte.

LED path indicator for wall recessed installation in 12,5 mm thickness plasterboard, or in brick/concrete wall with appropriate accessory. Frame made of painted aluminium alloy, dissipater made of aluminium alloy and clips made of harmonic steel. LED source protected by a transparent glass. Wall plaque and electronic driver 350mA or 700mA to be ordered separately.

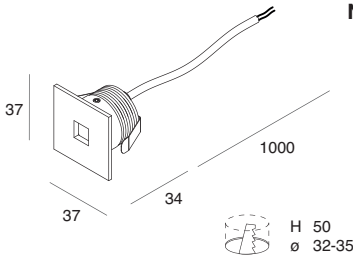

NEWSTEP QUADRATO

POWER	FLUX	3000K	4000K
2W - 700mA	110 lm	109401.01 <input type="checkbox"/> <input checked="" type="checkbox"/>	109402.01 <input type="checkbox"/> <input checked="" type="checkbox"/>
		.02	.02




NEWSTEP TONDO

POWER	FLUX	3000K	4000K
2W - 700mA	110 lm	109403.01 <input type="checkbox"/> <input checked="" type="checkbox"/>	109404.01 <input type="checkbox"/> <input checked="" type="checkbox"/>
		.02	.02

NEWSTEP

ACCESSORI ACCESSORIES




PLACCA MURALE
Per installazione su scatola di derivazione universale mod. 503 (non inclusa), da stuccare e rasare.

CODE

109405.99

WALL PLAQUE
To be fixed on a 503 universal connection box (not included), to plast over and to level.




ALIMENTATORE ELETTRONICO STABILIZZATO
220-240V 50/60Hz
alloggiabile nella scatola di derivazione universale mod. 503 (non inclusa) e passante per il foro della placca murale 109405.99

CODE

101322.99

POWER	A (mm)	D (mm)	H (mm)	L (mm)
4W	27	34	21	53

ELECTRONIC STABILIZED DRIVER
220-240V 50/60Hz
Suitable for the universal junction box mod. 503 (not included) and passing through the hole of the wall plaque 109405.99



ALIMENTATORE ELETTRONICO DIMMERABILE STABILIZZATO
220-240V 50/60Hz
Idoneo per il collegamento in serie di max 10 Newstep

CODE

101336.99

POWER	A (mm)	D (mm)	H (mm)	L (mm)
25W	52	55	23	120

ELECTRONIC DIMMABLE STABILIZED DRIVER
220-240V 50/60Hz
Suitable for the connection in series of max 10 Newstep