NINA

Piantana LED UGR<19 e CRI>90 a luce diretta/indiretta a emissione simmetrica in proporzione di 43/57.
Rifrattori in PMMA microprismatizzato anti-abbagliamento per la luce diretta, e protezione del vano ottico superiore con schermo diffusore in policarbonato trasparente. Testata e stelo in lega di alluminio e base in acciaio, verniciati a polvere con finitura opaca di colore bianco. Accensione/spegnimento e regolazione unica delle emissioni. Regolazione manuale della luminosità tramite dimmer rotativo. Sensore PIR per riconoscimento di presenza e fotosensore per il rilevamento luminosità.
Alimentazione elettronica dimmerabile 220-240V 50/60 Hz.
Cavo di raccordo nero di lunghezza 2,5 m, con terminale a spina Schuko 2P+T.

Floor lamp, LED UGR<19 and CRI>90 with direct/indirect symmetrical emission, in a proportion of 43/57. Anti-glare microprismatic PMMA refractors for direct light, and upper optics protection with transparent polycarbonate diffuser screen. Head and pole in aluminum alloy and a steel base, all powder-coated in a white matt finish. On / off and single emission adjustment. Manual brightness adjustment via a rotary dimmer switch. PIR sensor for presence detection and photosensor for brightness detection.
Dimmable electronic power supply 220-240V 50/60 Hz.
Black connection cable 2.5 m long, with a Schuko 2P+T plug terminal.

IP 40 | 220-240V 50/60Hz | CRI >90 | UGR <19 | DIMMABLE | GRUPPO 0 RG0 | 5 anni years | CAM. Edilizia

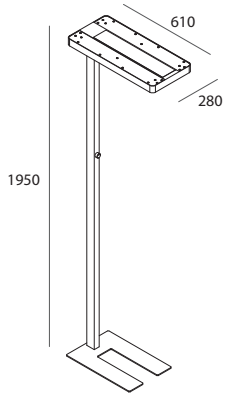

POWER	FLUX	4000K ☐
80W	6425 lm	**106601.01**