





VELA

Sistema lineare con LED integrati a luce indiretta per installazione a parete. VELA è l'illuminazione Novalux ideale per creare un'atmosfera confortevole che garantisce, al tempo stesso, un'ottima prestazione luminosa. L'apparecchio LED può essere installato in fila continua, nella versione con PCB LED o Strip LED, tagliabile su misura.

Linear system with embedded LEDs emitting indirect light for wall mounting VELA is the ideal Novalux lighting fixture to create a comfortable atmosphere while providing excellent lighting performance. The LED luminaire can be installed in a continuous line, as a LED PCB or as a LED strip, cuttable to measure.

VELA

- **VERSIONE PCB LED STAND ALONE
CON ALIMENTAZIONE INTEGRATA**

VERSION WITH LED PCB
AND INTEGRATED POWER SUPPLY

- **VERSIONE PER STRIP LED SINGOLA O DOPPIA,
LUNGHEZZA TAGLIABILE SU MISURA**


SINGLE OR DOUBLE STRIP LED VERSION,
LENGTH THAT CAN BE CUT TO MEASURE ON SITE

- **INSTALLABILE IN FILA CONTINUA,
PRATICITÀ DI MONTAGGIO**

CONTINUOUS LINE EASY INSTALLATION

- **LUCE DIFFUSA INDIRETTA**

INDIRECT DIFFUSED EMISSION

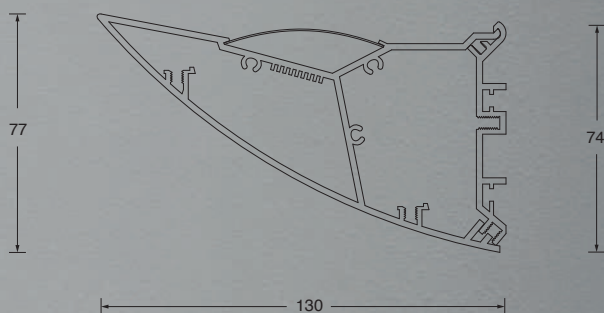




VELA
PCB



Sistema lineare con LED integrati a luce indiretta per installazione a parete.
Profilo e testate in lega di alluminio verniciata e schermo diffusore in policarbonato satinato.
Alimentatore elettronico, schermo e kit di giunzione inclusi.
Testate terminali da ordinare a parte.

Linear system with integrated LED for indirect light emission, for wall mounting.
Profile and end caps made of painted aluminium alloy and diffuser made of frosted polycarbonate.
Electronic driver, diffuser and junction kit included.
End caps to be ordered separately.




**PROFILO
LINEARE
PCB**

**LINEAR
PROFILE
PCB**

L (mm)	POWER	FLUX	3000K ☐	FLUX	4000K ☐
560	21W	2813 lm	100401.01	2850 lm	100402.01
840	31W	4220 lm	100403.01	4275 lm	100404.01
1120	41W	5626 lm	100405.01	5700 lm	100406.01
1400	51W	7033 lm	100407.01	7125 lm	100408.01
1680	61W	8440 lm	100409.01	8550 lm	100410.01

DALI-PUSH

L (mm)	POWER	FLUX	3000K ☐	FLUX	4000K ☐
560	21W	2813 lm	100411.01	2850 lm	100412.01
840	31W	4220 lm	100413.01	4275 lm	100414.01
1120	41W	5626 lm	100415.01	5700 lm	100416.01
1400	51W	7033 lm	100417.01	7125 lm	100418.01
1680	61W	8440 lm	100419.01	8550 lm	100420.01




**PROFILO
ANGOLARE
ESTERNO**

**EXTERNAL
CORNER
PROFILE**

L (mm)	POWER	FLUX	3000K ☐	FLUX	4000K ☐
636x636	41W	5626 lm	100427.01	5700 lm	100428.01

DALI-PUSH

L (mm)	POWER	FLUX	3000K ☐	FLUX	4000K ☐
636x636	41W	5626 lm	100431.01	5700 lm	100432.01



**PROFILO
ANGOLARE
INTERNO**

**INTERNAL
CORNER
PROFILE**

L (mm)	POWER	FLUX	3000K ☐	FLUX	4000K ☐
637x637	41W	5626 lm	100425.01	5700 lm	100426.01

DALI-PUSH


L (mm)	POWER	FLUX	3000K ☐	FLUX	4000K ☐
637x637	41W	5626 lm	100429.01	5700 lm	100430.01

VELA STRIP LED



Sistema lineare per strip LED a luce indiretta per installazione a parete.
Profilo in lega di alluminio verniciata e schermo diffusore in policarbonato satinato, tagliabili in opera. Installabili fino a 2 strip LED affiancate.
Schermo diffusore e kit di giunzione inclusi.
Testate terminali, Strip LED e alimentatore elettronico 24Vdc da ordinare a parte.

Linear system with strip LED for indirect light emission, for wall mounting.
Profile made of painted aluminium alloy and diffuser made of frosted polycarbonate, cuttable on site.
Max 2 strip LED can be placed side by side. Diffuser and junction kit included.
End caps, Strip LED and electronic driver 24Vdc to be ordered separately.




PROFILO LINEARE PER STRIP LED

LINEAR PROFILE FOR STRIP LED

CODE ☐ L (mm)

100421.01 2000




STRIP LED

Pag. 446

Installabili fino a 2 strip LED affiancate.
Max 2 strip LED can be placed side by side.

VELA
PCB

ACCESSORI
ACCESSORIES




TESTATE TERMINALI (2 pz.)
END CAPS (2 pcs)

CODE	☐
100422.01	


VELA
STRIP LED

ACCESSORI
ACCESSORIES




GIUNTO ANGOLARE ESTERNO
EXTERNAL JUNCTION KIT

CODE	☐
100424.01	




GIUNTO ANGOLARE INTERNO
INTERNAL JUNCTION KIT

CODE	☐
100423.01	



TESTATE TERMINALI (2 pz.)
END CAPS (2 pcs)


CODE	☐
100422.01	



KIT DI GIUNZIONE
Da prevedere in caso di taglio in opera del
profilo lineare e recupero della parte rimanente.

JUNCTION KIT
used when linear profile is cut to measure
on site and the remaining part is reused.

CODE	
100433.99	



ALIMENTATORI 24Vdc
INSERIBILI NEL PROFILO
Vedi sezione Gestione Luce

DRIVERS 24Vdc
THAT FIT IN THE PROFILE
See section Light Management

CODE	POWER	VERSION
101301.99	45W	ON-OFF
101302.99	100W	ON-OFF
101318.99	80W	DALI/PUSH (White) - DALI (RGB/RGBW/TW)

